


SHARK - LED FLOODLIGHT

The Shark is your choice if you are looking for a floodlight that offers the most light out of the power you have available. The Shark is ideal for use in heavy machinery such as cranes, shovels and large excavators and is widely used in light towers. Thanks to its excellent corrosion resistance, the Shark is suitable for offshore applications.

- High Performance LED's
- Integral temperature monitoring device
- Corrosion-resistant aluminum housing
- High thermal conductivity
- A number of electrical protections
- Vibration resistance
- Waterproof, IP69K
- Impact resistance, IK10

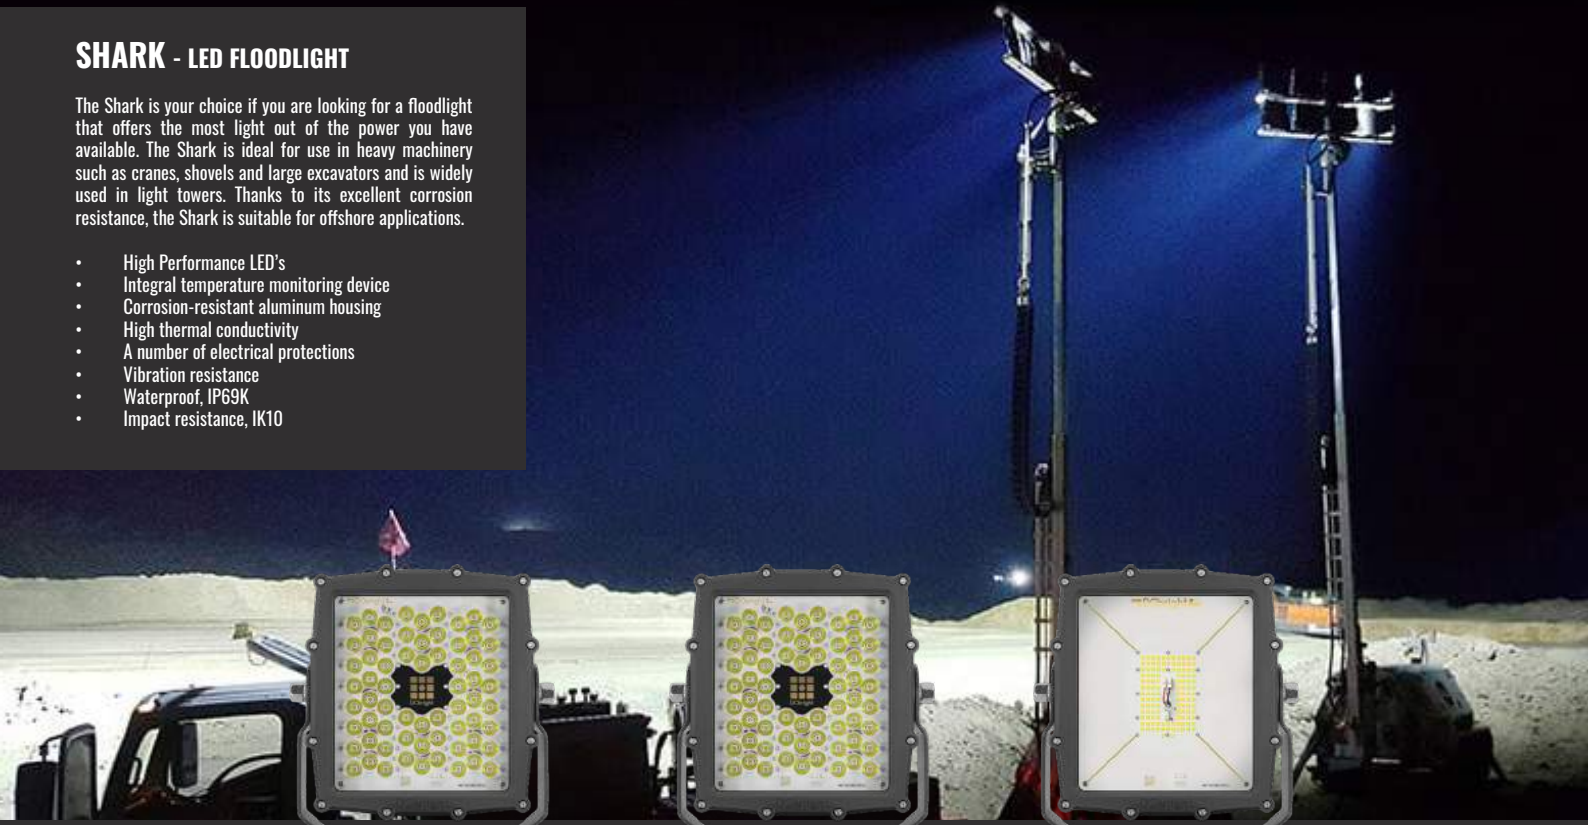

SH66 320AC

Power : 320W
 Light output : 50.000 lm
 Efficiency : 156 lm/W
 Voltage : 90-305VAC /
 180-528VAC

SH66 320DC

Power : 320W
 Light output : 46.000 lm
 Efficiency : 144 lm/W
 Voltage : 24V (20-35V)

SH240 HEF

Power : 240W
 Light output : 47.500 lm
 Efficiency : 198 lm/W
 Voltage : 90-305VAC
 Light angle : 120° (no optics)



Choosing the right optics ensures proper illumination of important area's



Various light colours allow for a brightly lit working enviroment at night

Barracuda Specifications

IP-rating : IP69K
 Expected life span : 196 000 hours, L80B10
 Light angle adjustment : +/- 240° in 30° steps

Weight and packaging

Lamp weight : 7.2 kg
 Bracket weight : 2.0 kg
 Gross weight : 9.2 kg
 Product dimension : 320 x 350 x 90 mm
 Packaging dimension : 380 x 410 x 150 mm

Available options

Light angles : 14° - 38° - 70° - 14x46°
 Light beam colour : 6500K - 4000K - 2700K - 2200K

