

COLLECTED TECHNICAL DATASHEETS

Manta canopy

The canopy light for forecourts and covered positions, as a recessed and surface mounted panel and as a high temperature build to +120 °C.

DATASHEETS

2

OUTPUT RANGE

14,400 to
22,400 lm

POWER

75 to 100 W

TYPE

LED canopy light



Manta canopy

Manta HT

Contents

Every datasheet in this document has the same five sections: what it is and where it is used, the light output and the optics, the full specification, the mechanics and the driver, and the ordering information. The page numbers run through the whole document.

THE DATASHEETS IN THIS DOCUMENT

2	Manta canopy	22,400 lm luminous flux · 100 W power 224 lumens per watt, the highest efficacy in the JEL range.
7	Manta HT	14,400 lm luminous flux · 75 W power 14,400 lumens at 75 watts and an ambient temperature of +120 °C, in the same 380 × 380 mm panel.

HOW TO READ THIS DOCUMENT

This is the complete set for one product. Every version has its own datasheet with the same five sections, so a specification can be compared line by line between the versions without opening a second document.

The photometry is measured per optic and the IES files are on the product page. Where a figure depends on the build, the specification states the condition next to it rather than in a footnote.

WHAT IS NOT IN THIS DOCUMENT

316L version	Not available on this housing
Linear positions	The Linear, in four lengths and linkable into a run

CANOPY LED LUMINAIRE

Manta canopy



Shown: Manta Surface, 22,400 lm, 380 × 380 mm panel.

CE IP69K IK08 Class II C5 ISO 9223

Ta -45 ... +50 °C 90-305 VAC internal driver

DALI-2 · 0-10 V · PWM · NFC 224 lm/W

CREE 304 retrofit 5-year warranty

224 lumens per watt, the highest efficacy in the JEL range. The canopy luminaire for forecourts and covered areas, in a 380 × 380 mm panel that recesses, surface mounts, or drops into an existing CREE 304 opening.

LUMINOUS FLUX

22,400 lm

POWER

100 W

EFFICACY

224 lm/W

INGRESS

IP69K

IMPACT

IK08

PANEL

380 × 380
mm

Values apply to the version without optics at 5700 K, Ta 25 °C, including driver consumption. With optics the luminous flux is 20,600 lm.

WHY IT IS SPECIFIED

224 lumens per watt. A large number of LEDs driven far below their maximum. That is where the efficacy comes from, and it is why the junction temperature stays low. A canopy burns most of the year.

Three mounting depths, one 380 × 380 panel. Recessed at 20 mm, surface at 95 mm and surface extended at 185 mm. The extended version is the retrofit panel that drops into an existing CREE 304 opening, so a forecourt is converted without cutting the canopy.

IP69K on a canopy. Forecourts collect exhaust, salt and road film and are washed down. Most canopy luminaires are rated for a dry indoor ceiling; this one is rated for a pressure washer.

WHERE IT IS USED

Fuel and service station forecourts

Truck and fleet fuelling canopies

Loading dock canopies and shelters

Covered walkways and passenger canopies

Car park entrances and pay stations

Drive through lanes

Wash bay and inspection canopies

Weighbridge and gatehouse covers

Retrofit of existing CREE 304 canopy positions

Covered process areas

VERSIONS

	Recess	Surface	Surface Extended
Code	MNAC02	MNAC01	Not yet issued
Flux	22,400 lm	22,400 lm	22,400 lm
With optics	20,600 lm	20,600 lm	20,600 lm
Depth	20 mm	95 mm	185 mm
Weight	3.9 kg	4.9 kg	5.4 kg

Surface Extended is the same article as the retrofit panel for existing CREE 304 positions. Its article code is not yet issued. A high temperature version to +120 °C is covered by the **Manta HT** datasheet.

Light output and optics


Values apply to the version without optics at Ta 25 °C, including driver consumption. All three mounting depths share the same optical platform and the same photometry.

BEAM CHARACTERISTICS


Optic	Distribution	Beam angle 50 % of peak	Field angle 10 % of peak	Typical use
No optic	Very wide, diffuse	136°	168°	The standard build. Canopies at 4 to 6 m over a forecourt
30°	Narrow, symmetric	36°	58°	High canopies and truck fuelling lanes above 6 m
60°	Wide, symmetric	–	–	The general purpose optic for a covered lane or a dock
120°	Very wide, symmetric	–	–	Very low canopies and covered walkways

The Manta without optics reaches 224 lumens per watt precisely because there is no optic in front of the LED to take light away. With optics the flux is 20,600 lm. On a low canopy the diffuse build is normally correct; on a truck fuelling canopy above six metres a 30° optic puts the light on the lane instead of on the canopy edge.

LIGHT DISTRIBUTION

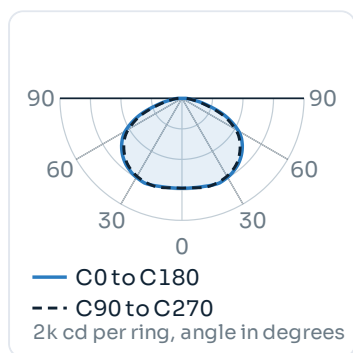

No optic, standard build

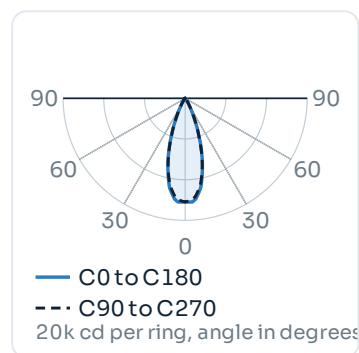

30° narrow

OBTRUSIVE LIGHT

ULOR at 0° tilt	0 %
Under a canopy	All light is directed downward by the mounting position itself
Amber 2200 K	Available, for light sensitive surroundings

A canopy luminaire is mounted in a ceiling, so the upward light output ratio is 0 % by construction. What matters on a forecourt is the light that leaves sideways past the canopy edge and reaches the carriageway or the housing behind it. The 30° optic is the answer to that, and where the boundary condition is formal the DarkLight range covers the open areas around the canopy.

COLOUR AND CONSISTENCY

Colour temperatures	5700 K, 5000 K, 4000 K, 3000 K, 2700 K, amber 2200 K
Tuneable white	4000 K with 2200 K and 1700 K, switchable in operation
Colour rendering	Ra > 70 standard, optionally 80 or 90
Colour consistency	MacAdam step 3 or better
LED service life	TM-21 L90B05 > 360,000 h at 50 °C
Why 224 lm/W	Many LEDs driven far below their maximum, and no optic in front of them

Full specification

All values apply to the standard configuration at 25 °C ambient, including lens losses and driver consumption. A hyphen means the entry does not apply to that version.


	Recess	Surface	Surface Extended
PERFORMANCE			
Luminous flux	22,400 lm, or 20,600 lm with optics		
Power consumption	100 W		
Efficacy	224 lm/W		
Optics	None as standard, or 30°, 60° or 120°		
ELECTRICAL AND DRIVER			
Supply voltage range	90–305 VAC, 50/60 Hz		
Current draw	0.83 A at 120 V · 0.45 to 0.36 A at 220 to 277 V		
Power factor at full load	> 0.9 at 70 to 100 % load		
Surge protection	6 kV line to line, 10 kV line to earth (IEC 61000-4-5)		
Dimming	0–10 V, PWM, DALI-2, or over NFC		
Driver	Internal BLD120, no external box		
CONSTRUCTION			
Housing	Cast aluminium, less than 0.08 % copper		
Surface finish	Conversion layer plus 2-layer titanium-based e-coating		
Bracket	Fixed bracket, aluminium, less than 0.08 % copper		
Front	Diffuse chemically hardened glass, or diffuse borosilicate, IK08		
Protection class	Class II		
Ingress protection	IP66, IP67, IP68 and IP69K, each class tested separately		
Impact resistance	IK08 (IEC 62262)		
Corrosion class	C5 industrial and marine (ISO 9223)		
DURABILITY AND DIMENSIONS			
Ambient temperature	–45 to +50 °C		
LED service life	TM-21 L90B05 > 360,000 h at 50 °C		
Cable and termination	H07BQ-F, 4 cores (2 × 1.5 mm ² + 2 × 0.5 mm ²), 0.3 m, free wire ends		
Dimensions	380 × 380 × 20 mm	380 × 380 × 95 mm	380 × 380 × 185 mm
Weight	3.9 kg	4.9 kg	5.4 kg
Retrofit	-	-	Fits an existing CREE 304 opening
Warranty	5 years on the complete luminaire		

The 224 lumens per watt is correct and is not a typing error. It comes from a large LED count driven far below maximum, combined with a build that has no optic in front of the LEDs. With optics the figure is lower and is stated separately.

Mechanics, mounting and driver

All drawings are to scale and dimensioned in millimetres. DXF and STEP models are available on request.

PANEL AND MOUNTING DEPTHS

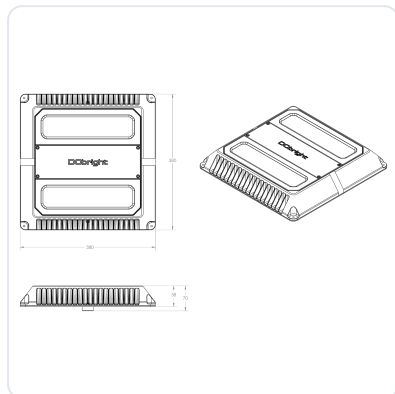


Panel	380 × 380 mm, all versions
Recess	20 mm deep, 3.9 kg
Surface	95 mm deep, 4.9 kg
Surface Extended	185 mm deep, 5.4 kg
Bracket	Fixed, aluminium
Front	Diffuse glass or borosilicate, IK08

MOUNTING AND ACCESSORIES


Fixed bracket	Aluminium, supplied as standard
Optics	30°, 60° or 120°, ordered as a suffix
Borosilicate front	Diffuse, option
CREE 304 retrofit	Surface Extended version
High temperature version	Manta HT to +120 °C. Separate datasheet
Open areas around the canopy	DarkLight D or WP

MOUNTING



Recess	Into the canopy ceiling, 20 mm
Surface	Onto the ceiling, 95 mm
Surface Extended	Onto the ceiling, 185 mm, or into a CREE 304 opening
Washdown	The panel and the seal are rated for the regime

CREE 304 RETROFIT

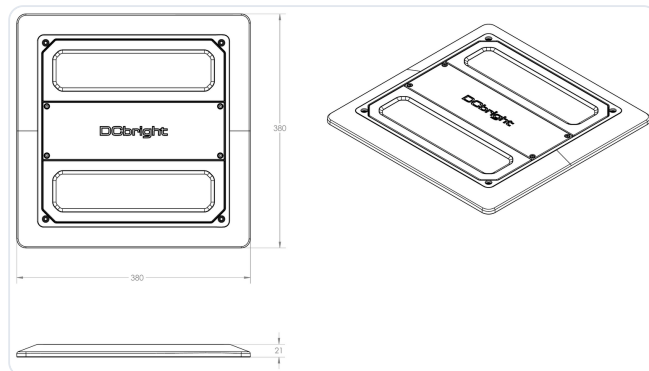

Which version	Surface Extended
Fits	An existing CREE 304 canopy opening
Why it matters	The canopy does not have to be cut or patched
Cable	0.3 m tail, free wire ends
Article code	Not yet issued

INTERNAL DRIVER

Type	BLD120, inside the housing
External box	None
Case temperature	Tc -40 to +90 °C
Lifetime	≥ 100,000 h at Tc 75 °C
MTBF	≥ 320,000 h at 75 °C case
Control	0–10 V, PWM, DALI-2, or over NFC

Everything inside a 20 mm panel. On a canopy there is no space above the ceiling for a driver box and no access to it once the panel is in. The Manta carries its driver inside and is still IP69K.

Ordering, standards and documents

ORDER CODE

Example **MNAC01-50K**

Manta Surface, 5000 K, no optic

MNAC02 · MNAC01

Recess · Surface

Surface Extended

Also the CREE 304 retrofit panel. Article code not yet issued

57K · 50K · 40K · 30K · 27K · 22K

Colour temperature, amber 2200 K included

TW

Tuneable white, 4000 K with 2200 K and 1700 K

.30 · .60 · .120

Optic suffix. Without a suffix the luminaire is supplied without optics

Without an optic suffix the Manta delivers 22,400 lm at 224 lm/W. With an optic the figure is 20,600 lm. Front material and control protocol are confirmed at order.

COMBINATIONS

Optic with any mounting depth Possible

Tuneable white with any depth Possible

CREE 304 retrofit Surface Extended only

Borosilicate front Possible

DC supply Not available

High temperature See the Manta HT

STANDARDS AND VERIFICATION

Subject	Standard	Verification
Luminaire safety	IEC/EN 60598-1, -2-5	In-house test
EMC emission and immunity	EN 55015, EN 61547 · IEC 60533 marine, bridge and open deck	TÜV
Ingress	IEC 60529 and ISO 20653. IP66, IP67, IP68, IP69K	In-house test
Impact and vibration	IEC 62262 IK08 · IEC 60068-2-6 at 6 G	In-house test
Shock and corrosion	IEC 60068-2-27 · ISO 9223 class C5, industrial and marine	In-house test
Photometry	IES LM-79, IES files per optic	In-house test
Substances	RoHS, REACH	Self-declaration

BEFORE YOU ORDER

A sample luminaire to hang before you commit to a project quantity.

Five years warranty on the complete luminaire.

A DIALux calculation from our engineers, on your site drawing.



PRODUCT PAGE

IES files and revision history, DXF and STEP on request, and project references.
jelproducts.nl/en/products/manta-canopy-light

WHERE IT EARNS ITS PLACE

The Manta earns its place under the roof. A canopy runs its lighting almost every hour of the year, it is washed down, it collects everything the traffic underneath throws up, and replacing a panel means closing the lane. At 224 lumens per watt with an IP69K rating and a retrofit version that fits the opening already in the ceiling, it answers all three at once.

Notes. Values are for the standard configuration; a bi-colour or high-CRI build changes the luminous flux and the quotation states the figure that applies. Luminaires per MCB is the manufacturer figure for ABB S200 at 220 V, a guide for engineering and not a substitute for the installation calculation. North American models on request. The JEL range is not ATEX or Ex certified.

HIGH TEMPERATURE CANOPY LUMINAIRE

Manta HT



Shown: Manta HT Surface, 14,400 lm, diffuse borosilicate front.

CE	IP69K	IK08	Class II	Ta -45 ... +120 °C
C5 ISO 9223	90-305 VAC	silicone cable 5 m		
borosilicate option		192 lm/W	recess and surface	
5-year warranty to +120 °C				

14,400 lumens at 75 watts and an ambient temperature of +120 °C, in the same 380 × 380 mm panel. The ceiling luminaire for hot covered spaces: oven roofs, drying chambers and process canopies.

LUMINOUS FLUX	POWER	EFFICACY
14,400 lm	75 W	192 lm/W
AMBIENT	INGRESS	PANEL
+120 °C	IP69K	380 × 380 mm

Values apply at 6500 K, at the stated ambient temperature, including driver consumption. Bi-colour and amber are not available on the high temperature versions.

WHY IT IS SPECIFIED

192 lm per watt at +120 °C. A high temperature luminaire normally costs efficacy because the usual approach is to derate a standard product. The Manta HT keeps most of the efficiency that makes the standard Manta what it is.

A flat panel in a hot ceiling. In an oven roof there is no depth available and no access from above. The recessed version is 20 mm deep and the panel is the whole luminaire.

Silicone cable to the driver. The driver sits outside the hot zone and is connected with 5 m of heat resistant silicone cable, so the only component in the heat is the one that can take it.

WHERE IT IS USED

Oven and kiln roofs	Sterilisation and autoclave rooms
Drying chambers and curing tunnels	Process canopies and extraction hoods
Bakery and food process ovens	Foundry and melt shop covered walkways
Paint lines and powder coating booths	Boiler house ceilings
Heat treatment and annealing chambers	Covered areas above hot process equipment
Climate and test chambers	

VERSIONS

	Recess HT	Surface HT
Article base code	MNHT02	MNHT01
Luminous flux	14,400 lm	14,400 lm
Power	75 W	75 W
Efficacy	192 lm/W	192 lm/W
Depth	20 mm	95 mm
Weight	3.9 kg	4.9 kg
Ambient	-45 to +120 °C	-45 to +120 °C

HT optics are not possible on the Manta: the housing is too shallow to carry one, so both high temperature versions are 120° very wide. For high temperature with optics, see the **Linear HT**, the **Barracuda HT** or the **Orca HT**.

The HT system

Engineered as a system for heat, not as a luminaire that tolerates it.

Standard industrial LED luminaires are specified to roughly +50 °C ambient. Above that the driver electronics fail first: in virtually every failure of LED lighting in a hot environment, the driver is the weak link. Every installation in the HT line therefore consists of two parts. The heat resistant luminaire sits in the hot zone and the driver sits outside it, supplied bare as standard or built into a DRB driver box, joined by heat resistant silicone cable. Nothing that fails at temperature is left in the heat.

+120 °C

continuous, with full warranty

+130 °C

short peaks permitted

5 m


heat-resistant silicone cable

130,000 h

driver life at Tc 50 °C

IP67

remote driver and DRB box

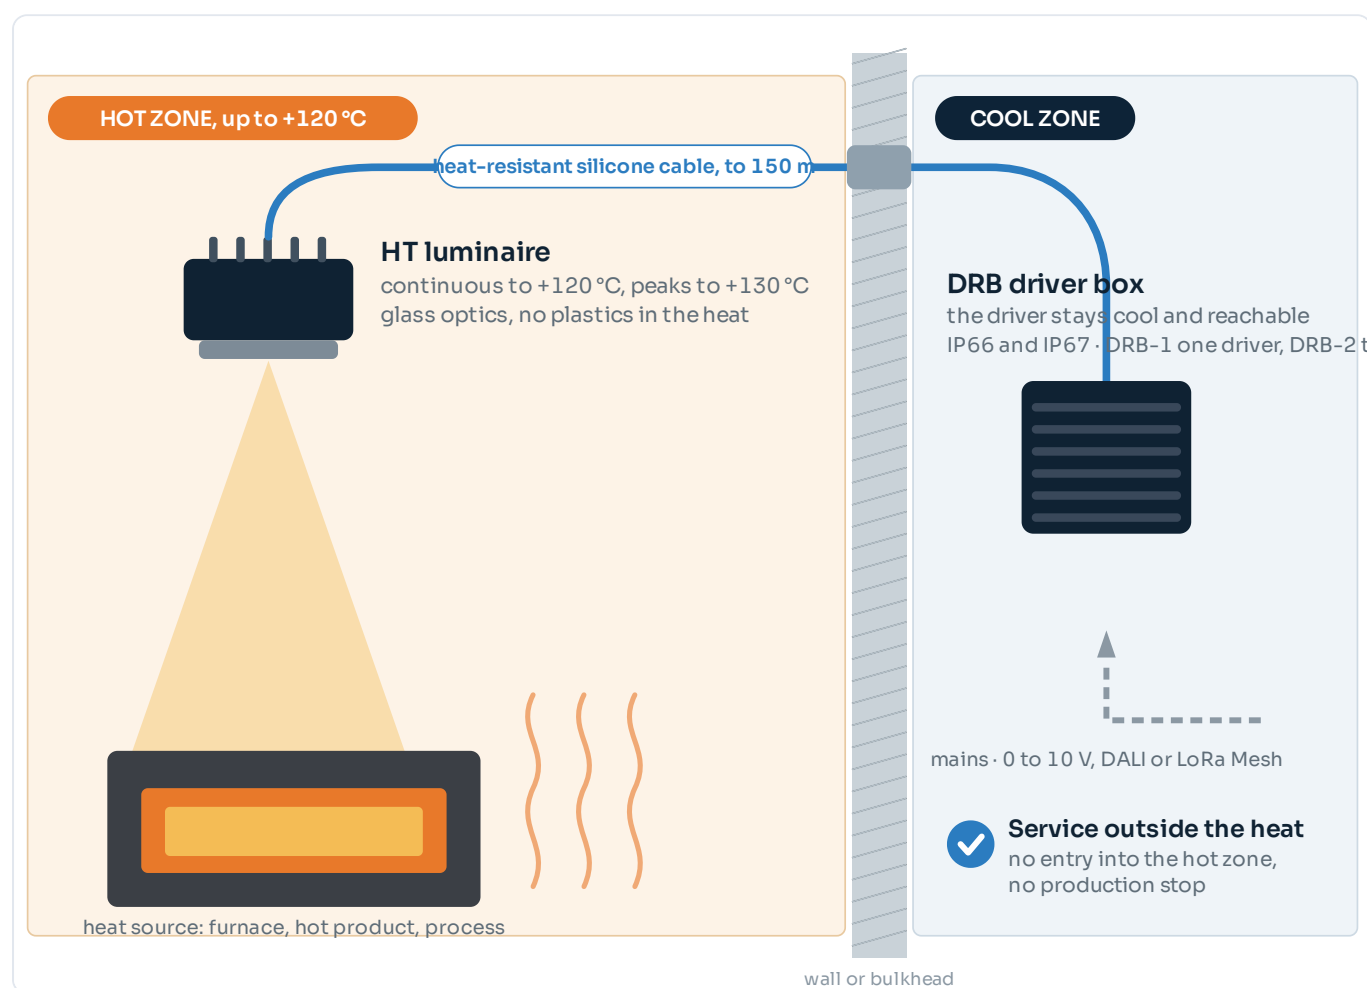

The HT system: the luminaire in the heat, the driver outside it.

BUILT-IN SELF-PROTECTION

The luminaire protects itself with internal temperature feedback. As the internal temperature rises it dims back automatically, and on overheating it switches itself off. That feedback runs through the four core supply of every luminaire: two cores of 2.5 mm² for power and two of 0.5 mm² for temperature control. It is the reason the cable specification has four cores rather than two.

Above +130 °C, or unsure about the thermal load? Our engineers calculate the thermal load per mounting position and design the complete system, including the driver location, cable route and DRB selection. Photometric values are measured at a +50 °C reference ambient. HT luminaires are not ATEX certified.

Light output and optics


Values apply at Ta 25 °C, including driver consumption. The luminous flux is maintained across the full ambient range; what changes with temperature is the LED service life, stated as a ladder in the colour table.

BEAM CHARACTERISTICS

Version	Distribution	Beam angle 50 % of peak	Field angle 10 % of peak	Typical use
Both versions	No optics, very wide	136°	168°	A hot ceiling directly above the work: oven roofs, chambers, hoods
HT optics	Not available on the Manta	–	–	See the Linear HT, the Barracuda HT or the Orca HT

HT optics of 20°, 40° and 60° exist for the Orca, the Barracuda and the Linear only. On the Manta, the Snapper and the Goby the housing is too small or too shallow to carry one, so those versions are supplied as 120° very wide. In a chamber or under a hood that is what is wanted anyway, because the luminaire sits directly above the work.

LIGHT DISTRIBUTION

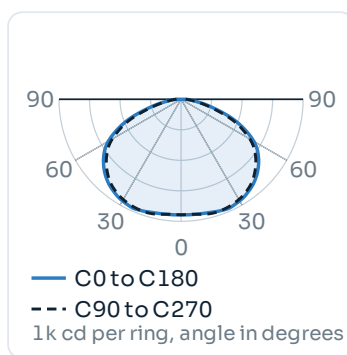

120° very wide, both versions

OBTRUSIVE LIGHT

ULOR at 0° tilt	0 %
Colour temperatures	6500 K, 4000 K and 2700 K
Bi-colour	Not available on the high temperature versions

Nothing is emitted above the horizontal at 0° tilt. That is the figure a permitting authority asks for when a site borders a residential area or a protected zone, and it is the starting point for any assessment against NEN-EN 12464-2 and the NSVV guidance on obtrusive light. Where the site condition demands a cut off optic rather than a controlled floodlight, see the DarkLight range.

COLOUR AND CONSISTENCY

Colour temperatures	6500 K, 4000 K, 2700 K
Bi-colour	Not available on the high temperature versions
Colour rendering	Ra > 70 standard, optionally 80 or 90
Colour consistency	MacAdam step 3 or better
LED service life	TM-21 L90B05, see the temperature ladder below
Ladder	> 360,000 h at 50 °C · 103,000 h at 85 °C · 71,700 h at 105 °C · 51,400 h at 120 °C

Full specification

All values apply to the standard configuration at 25 °C ambient, including lens losses and driver consumption. A hyphen means the entry does not apply to that version.


	Recess HT	Surface HT
PERFORMANCE		
Luminous flux	14,400 lm	14,400 lm
Power consumption	75 W	75 W
Efficacy	192 lm/W	192 lm/W
Beam	120° very wide	
ELECTRICAL AND DRIVER		
Supply voltage range	90–305 VAC, 50/60 Hz	
Current draw	0.63 A at 120 V · 0.34 to 0.27 A at 220 to 277 V	
Power factor at full load	> 0.9 at 70 to 100 % load	
Surge protection	6 kV line to line, 10 kV line to earth (IEC 61000–4–5)	
Dimming	0–10 V, PWM, DALI-2, or over NFC	
Driver	BLD120, mounted outside the hot zone	
Driver ambient	The driver box must sit in an ambient of at most +50 °C	
Driver life	≥ 100,000 h at Tc 75 °C, MTBF ≥ 320,000 h	
CONSTRUCTION		
Housing	Cast aluminium, less than 0.08 % copper	
Surface finish	Conversion layer plus 2-layer titanium-based e-coating	
Bracket	Fixed bracket, aluminium, less than 0.08 % copper	
Front	Diffuse chemically hardened glass, or diffuse borosilicate, IK08	
Protection class	Class II	
Ingress protection	IP66, IP67, IP68 and IP69K, resistant to steam and high pressure cleaning	
Impact resistance	IK08 (IEC 62262)	
Corrosion class	C5 industrial and marine (ISO 9223)	
DURABILITY AND DIMENSIONS		
Ambient temperature	–45 to +120 °C	
LED service life	TM–21 L90B05: > 360,000 h at 50 °C · 103,000 h at 85 °C · 71,700 h at 105 °C · 51,400 h at 120 °C	
Cable and termination	SiHF–OB silicone, 4 cores (2 × 2.5 mm² + 2 × 0.5 mm²), 5.0 m	
Dimensions	380 × 380 × 20 mm	380 × 380 × 95 mm
Weight	3.9 kg	4.9 kg
Colour temperatures	6500 K, 4000 K, 2700 K	
Warranty	5 years on the complete luminaire up to +120 °C	

The driver box is mounted outside the hot zone and is connected with heat resistant silicone cable. The LED life ladder applies to every high temperature luminaire in the range and is stated in the colour table rather than as a footnote.

Mechanics, mounting and driver

All drawings are to scale and dimensioned in millimetres. The driver is a separate item and is mounted outside the hot zone.

PANEL AND MOUNTING DEPTHS

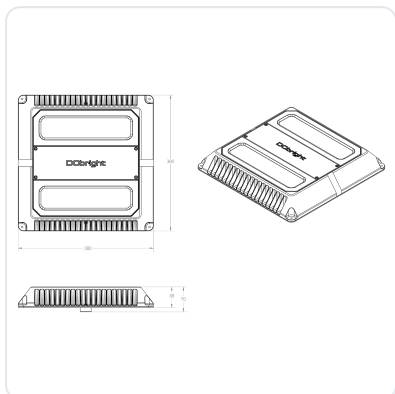

Panel	380 × 380 mm, both versions
Recess HT	20 mm deep, 3.9 kg
Surface HT	95 mm deep, 4.9 kg
Bracket	Fixed, aluminium
Front	Diffuse diffuse borosilicate for food industry applications
Optics	Not possible on this housing

MOUNTING AND ACCESSORIES


Fixed bracket	Aluminium, supplied as standard
DRB-1 driver box	Housing for the driver, outside the hot zone
Borosilicate front	Diffuse, where the glass sees radiant heat
Silicone cable	5.0 m as standard, longer on request
Linear alternative	Linear HT, for a run along a tunnel rather than a panel above it
Point source alternative	Goby HT, Snapper HT, Barracuda HT or Orca HT

DRB-1 DRIVER BOX



Use	Housing for the driver, outside the hot zone
DRB-1	One driver up to 320 W. 276 × 194 × 86.5 mm, 4.2 kg, IP66 and IP67
Ingress protection	IP66 and IP67
Ambient	+50 °C maximum

LUMINAIRE AND DRIVER

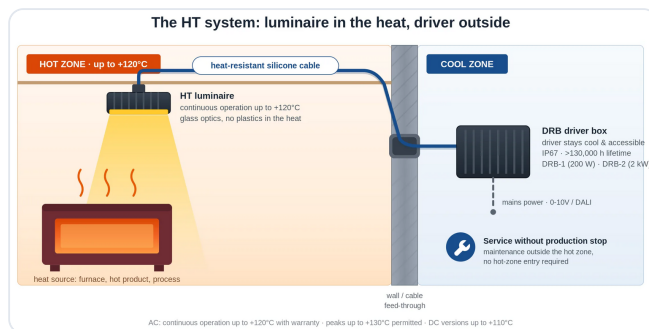

In the hot zone	The panel only
Outside the hot zone	The BLD120 driver
Between them	Heat resistant silicone cable, 5.0 m
Driver ambient	+50 °C maximum
Longer runs	On request

REMOTE DRIVER

Type	BLD120, 90–305 VAC or 127–420 VDC
Position	Outside the hot zone, ambient +50 °C maximum
Case temperature	Tc –40 to +90 °C
Lifetime	≥ 100,000 h at Tc 75 °C
MTBF	≥ 320,000 h at 75 °C case
Size and weight	161 × 68 × 33.5 mm, 800 g

Heat is what kills a driver, not the LED. On the standard Manta the driver sits inside the panel; on the HT version it moves out of the hot zone entirely. That is the whole difference between the two.

Ordering, standards and documents

ORDER CODE

Example **MNHT01-65K**

Manta HT Surface, 6500 K

MNHT02 · MNHT01	Recess HT · Surface HT
65K · 40K · 27K	6500 K · 4000 K · 2700 K
BORO	Diffuse borosilicate front instead of chemically hardened glass
Beam	120° very wide, no optic suffix
Cable	5.0 m silicone as standard, longer on request

Bi-colour and amber are not available on the high temperature versions. Cable length beyond 5.0 m, driver placement and the diffuse borosilicate front are confirmed at order.

COMBINATIONS

Borosilicate front	Both versions
Recess in a hot ceiling	Standard
DALI-2 and NFC	Standard
Bi-colour or amber	Not available
HT optics	Not possible on this housing
Surface Extended in HT	Not available

STANDARDS AND VERIFICATION

Subject	Standard	Verification
Luminaire safety	IEC/EN 60598-1, -2-5	In-house test
EMC emission and immunity	EN 55015, EN 61547 · IEC 60533 marine, bridge and open deck	TÜV
Ingress	IEC 60529 and ISO 20653. IP66, IP67, IP68, IP69K	In-house test
Impact and vibration	IEC 62262 IK08 · IEC 60068-2-6 at 6 G	In-house test
Shock and corrosion	IEC 60068-2-27 · ISO 9223 class C5, industrial and marine	In-house test
Photometry	IES LM-79, IES files per optic	In-house test
Substances	RoHS, REACH	Self-declaration

BEFORE YOU ORDER

A sample luminaire to hang before you commit to a project quantity.	Five years warranty on the complete luminaire.	A DIALux calculation from our engineers, on your site drawing.
---	--	--



PRODUCT PAGE

IES files and revision history, DXF and STEP on request, and project references.
jelproducts.nl/en/products/manta-canopy-light

WHERE IT EARNS ITS PLACE

In an oven roof, a drying chamber or an extraction hood there is no depth for a luminaire and no access from above once the plant is running. The Manta HT is a 20 mm panel that sits in that ceiling permanently, at 192 lumens per watt, with the only heat sensitive component mounted where a technician can reach it.

Notes. Values are for the standard configuration. The warranty follows the operating temperature: five years to +120 °C on AC and to +110 °C on DC. The LED life ladder in the colour table is the same for every high temperature luminaire in the range. North American models on request. The JEL range is not ATEX or Ex certified.